



Since we started our packaging  
business Incorporated in the year  
2017

## Contact Us

Vasai East, Kaman, Maharashtra 401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

## About company

Shree Gurukrupa Coal Energy is a leading importer and supplier of packaging machines. The range includes semi / fully automatic packaging machines, strapping machines, vacuum packing machine, shrink pack machines, band sealing machines, liquid packing machines, cappers, batch coding machines etc.



# Packaging Machines



## About product

Our company has achieved notable growth and has become a progressive supplier of new generation packaging machines in India. We are improvising ourselves by building more resources and execute day-to-day business Operations with higher level of professionalism and efficiency, Led by our founder Mrs. Madhura Diwan and General Manager Mr. Vilas Khot..

We are a market-savvy company, with a customer-oriented quality deliverance approach that guides us to provide customized packaging machinery for specific packaging processes. Our prime focus is to create maximum utility and offer value for money to our customers. Hence, we make every effort to understand client's business and accordingly procure machines that meet their specific requirement to the fullest. Our prime motive is to offer customer satisfaction in the service we provide to them by assisting clients to expand their business profits.

## Our Product

We have developed future-ready projects for 1000+ clients.

- ·Band Sealer
- ·Box Strapping Machine
- ·Capping Machine
- ·Carton Sealer
- ·Coding Machine
- ·Cup Sealer
- ·Granule Filler Machine
- ·Induction Machine
- ·Ink-Jet Printer
- ·L- SEALER (Auto / Semi-Auto)
- ·Labelling Machine
- ·Pedal / Hand Sealer
- ·Pneumatic Paste/Liquid Filling Machine
- ·Shrink Packaging Machine
- ·Stretch Wrapping Machine
- ·Vacuum Packaging Machine



## Industries We Serve

Owing to our years of trading expertise, in-depth technical understanding and customer conscious approach, we have been catering to buyers from different industries. Our machines meet the packaging requirement of industries such as:

- ·Pharmaceutical
- ·Cosmetics
- ·Consumer Packaged Goods
- ·Stationery
- ·Ceramics & Sanitary ware
- ·Processed Food
- ·Printing & Publishing units
- ·Agro Products

**We have developed future-ready projects for 1000+ clients.**

## Quality :

We are a quality concerned company with a sole objective to deliver best packaging machinery. All machines offered by us are manufactured by companies of international repute. These are quality certified manufacturing units, which follow industry defined standards in product engineering. Thus, the different types of packaging machines offered by us are in accordance with international standards of functionality and reliability. The machines are supplied to clients along with the warranty papers and operational & maintenance manuals. We ensure to deliver machines in absolute factory condition.

## Why Choose US ?

We take pride in having a vast and ever growing list of satisfied customers from India and. Our satisfied customers is the result of our commitment towards transparency in dealing, timeliness in order processing and cost-benefit that we extend to our clients. Besides, a set of other factors that distinguish our position are:

- **Competitive pricing**
- **Ready to deliver stock for urgent orders**
- **Well established resource base**
- **Convenient supply of multiple products**
- **Strong distribution network**
- **Efficient deliveries to any destination**



# Our Product

- 1.5M CONVEYOR
- A-03 MANUAL PASTE FILLER
- BS-3020 TABLE TOP SHRINK TUNNEL
- BSA-4525 SHRINK TUNNEL
- DBC-800 STRETCH WRAPPING MACHINE
- DBC-800S PNEUMATIC STRETCH WRAPPING MACHINE
- DDX-450 TABLE TOP CAPPING MACHINE
- DGYF-200 MANUAL INDUCTION
- DGYF-500A MANUAL INDUCTION
- DGYF-500C MANUAL INDUCTION
- DSH-4020 TABLE TOP SHRINK TUNNEL
- DY-8B MANUAL RIBBON CODING MACHINE
- DZ-260 PD TABLETOP VACUUM PACKING MACHINE
- DZ-300A HOUSEHOLD VACUUM SEALER
- DZ-500\_2D SINGLE CHAMBER VACUUM PACKING MACHINE ANALOG TYPE
- DZ-500\_2E SINGLE CHAMBER VACUUM PACKING MACHINE DIGITAL TYPE
- DZ-600\_2SA DOUBLE CHAMBER VACUUM PACKING MACHINE
- DZ-W300 HOUSEHOLD VACUUM SEALER
- FA-300 PAGING MACHINE
- FR-900S MS HORIZONTAL CONTINUOUS BAND SEALER
- FR-900S SS HORIZONTAL CONTINUOUS BAND SEALER
- FR-900V MS VERTICAL CONTINUOUS BAND SEALER
- FR-900V SS VERTICAL CONTINUOUS BAND SEALER
- FXJ-3025S SEMI-AUTOMATIC CARTON SEALER
- FXJ-6050 SEMI-AUTO CARTON SEALER
- FZ-5000 GRANULE FILLER
- FZH-100 GRANULE FILLER
- FZH-500 GRANULE FILLER
- FZL-100 POUCH PACKING GRANULE FILLER
- GCA PNEUMATIC LIQUID FILLER
- GCGA PNEUMATIC PASTE FILLER
- HL BSG-450 HEIGHT ADJUSTABLE SHRINK TUNNEL
- HL FR-770 I MS HORIZONTAL CONTINUOUS BAND SEALER
- HL FR-770 I SS HORIZONTAL CONTINUOUS BAND SEALER
- HL FR-770 II MS VERTICAL CONTINUOUS BAND SEALER
- HL FR-770 II SS VERTICAL CONTINUOUS BAND SEALER
- HL FXA-6050 SEMI-AUTO CARTON SEALER
- HP-241 B TABLE TOP RIBBON CODING MACHINE
- HP-241 LD ELECTRIC COLOUR RIBBON PRINTER
- HP-241 LDII HOT INK CODER
- HW-450 HAND WRAPPER
- JGS-980 ROPP CAPPING MACHINE
- KZ-900 GREY BOX STRAPPING
- LGYF-2000AX-I CONTINUOUS INDUCTION SEALER
- LT-130 DOUBLE HEAD ELECTRIC LIQUID FILLER
- LT-130 SINGLE HEAD ELECTRIC LIQUID FILLER
- LX-6000 CONTINUOUS INDUCTION SEALER SS BODY
- MACHINE INNER PHOTOS
- MT-30 MANUAL ROUND BOTTLE LABELING
- MT-50 I ROUND BOTTLE LABELING MACHINE WITH INKJET PRINTER
- MT-50 ROUND BOTTLE LABELING MACHINE
- MT-50 ROUND BOTTLE LABELING MACHINE BETTER MODEL
- MT-60 FLAT BOTTLE LABELING MACHINE
- MT-60 FLAT BOTTLE LABELING MACHINE ECONOMY MODEL
- MT-130 AUTOMATIC LABELING MACHINE
- MY-380\_FW MS BODY DRY-INK CODING MACHINE
- MY-380\_FW SS BODY DRY-INK CODING MACHINE
- P-100 HANDHELD INKJET PRINTER
- P-100 ONLINE INKJET PRINTER

# Our Location

- **HEAD OFFICE 1:** PLOT NO. B/09, MIDC, SHIRALA, SANGLI - 415408
- **OFFICE 2:** FLAT NO.603, C WING, CROSSWIND SOCIETY, BANER, PUNE - 411045
- **WAREHOUSE:** U2 G17, ED ESTATE, SAGPADA, VASAI (E) - 401208
- **OFFICE (Godown):** 3 - Plot No. 143, Opp. Kolhapur Steel, Nagaon Phata, Shirolī - 416 122

Visit Now :- [www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

**!! Thank You !!**

# Specification

Model FR-900S  
Voltage 110/220V 50-60Hz

Power 500W  
Sealing speed 0-12m/min

Sealing width 6-12mm  
Temperature range 0-300°C

Max. conveyer loading 3kgs  
Printing category Steel wheel printing

Weight Net.23kg  
Machine size 820X400X300mm

**FR900V  
CONTINUOUS  
BAND SEALER  
S.S BODY WITH  
VERTICAL TYPE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model FXJ6050
- Sealing capacity About 1000 standard cases per hour
- Width of the adhesive tape 48/60/72MM
- Power source 220V/50hz ,180w
- Max sealing size(W\*H) 500\*600MM
- Min sealing size (W\*H) 200\*220MM

**FXA-6050  
SEMI-AUTO  
CARTON  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)





# Specification

- Technical parameters
- Model I FXJ -6050
- Voltage (V/Hz) AC 220/50,110/60
- Power (W) 200
- Max. Carton Size (W x H x L) (mm) 500x500x100
- Min. Carton Size (W x H x L) (mm) 180x130x130
- Sealing Speed (m/min) 20
- Height of Table (mm) 635-780
- Width of Adhesive Tape (mm) 48/60/76
- Used Adhesive Tape BOPP, water-free adhesive tape, PVC adhesive tape
- Conveying Form I Drive by two sides conveying belts
- Dimension (LxW xH) (mm) 1755x800x(960 to 1650)
- Net Weight (kg) 150
- Maximum Outside Diameter of
- 250
- Adhesive Tape (mm)

- HL FXJ-6050  
CARTOON TAPPING  
MACHINE(3 INCH  
TAPE)

- HL FXJ-6050  
CARTOON TAPPING  
MACHINE (2 INCH  
TAPE)

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Voltage : 220V 50/60Hz
- Power : 0.18KW
- Speed : 10-20 carton/min
- Width of adhesive tape: 30-45MM
- Applicable carton: L130--,W80-250,H90-300
- Packing size: 930\*670\*920
- Machine size: 105KG


**FXJ3025S SEMI-  
AUTOMATIC  
CARTON  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

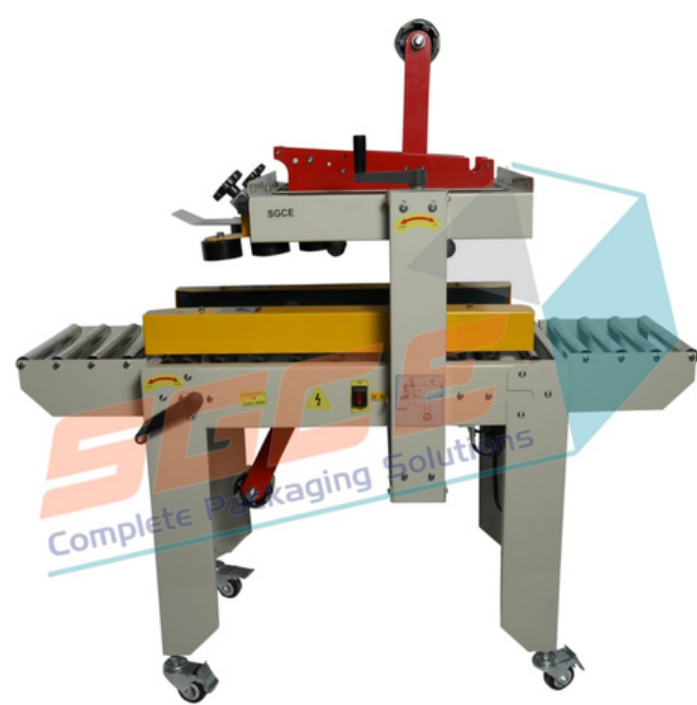

# Specification

- Power source AC220V/50HZ ; 110V,60HZ
- Sealing capacity About 1000 standard case per hour
- Width of the adhesive tape 36mm,48mm,60mm
- Way of transmission Side conveyor
- Max sealing size (W\*H) 500\*500mm
- Min sealing size (W\*H) 120\*110mm
- Machine size 1790\*800\*1410mm

**FXC5050A  
SEMI-  
AUTOCARTON  
SEALING  
MACHINE**


## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



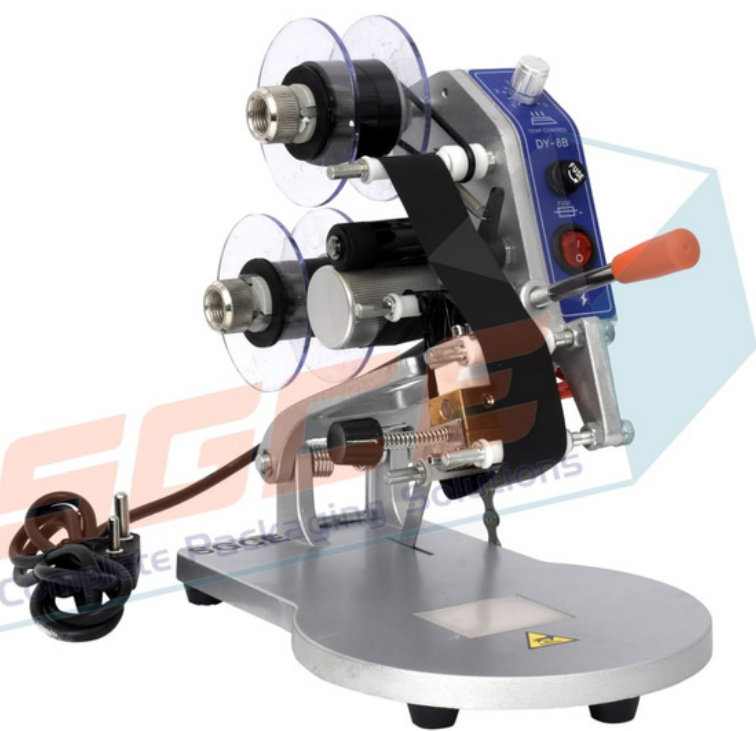

# Specification

- Voltage 110V/220V 50/60Hz
- Power 40W
- Printing speed 10-30 times/min
- Temperature 0-200°C
- Printing area Max. three line 12x3 words
- Weight 3.8kgs
- Size(L\*W\*H) 330\*260\*210mm


**DY- 8 MANUAL  
CODING  
MACHINE - 3  
LINE / 4 LINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

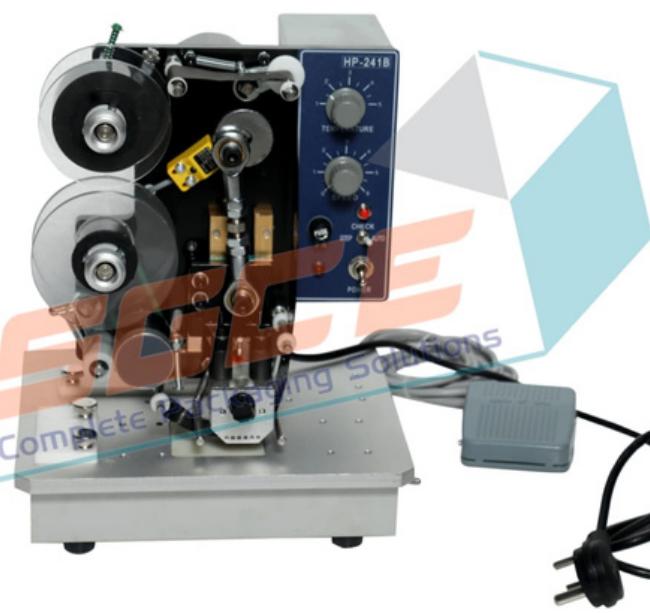

# Specification

- Voltage AC 220V/50HZ 110V/60HZ
- Speed 10-100umes/min, stepless speed adjustment
- Prinung area Single line: max. 4x 3 5mm, app. 15 pcs of type
- Double line: max. 10X 35mm, app. 30 pcs of ty pe
- Tiple line max. 16\* 35mm, app 45 pcs of iype
- Printng ly pe Arabic numbers. English leters and (Chunese characeis
- Size of ribbon Standard width 35mm, length 100mmu. coil diacwr 25 uii
- Power 150W
- Siz 255 225\* 315uum
- Net weight 7kg
- Motor Reducer motor: 15W 220V, rotalion speed 14tuK/nin

**HL HP 241 B  
TABLE TOP  
RIBBON  
PRINTER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- 1.5M 200MM Conveyor
- 200mm conveyor
- Voltage: 220V/50HZ
- Power: 60W
- Conveyor Speed: 0-15m/min.
- Loading: 15kg
- Machine weight: 20kg

**1.5M 200MM  
CONVEYOR**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- 300mm conveyer
- Voltage :220V/50HZ
- Power:60W
- Conveyor Speed:0-15m/min
- Loading:15kg
- Machine weight:23.5kg

**1.5M 300MM  
CONVEYOR**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model name - FA 300
- Boundary dimension - 1400mm\*  
350mm\*700 mm
- Weight - 40 kg
- Rate of VOLTAGE - Ac 220 v
- Power - 90 w
- Speed - 0- 50m/min

**MODEL NAME -  
FA 300**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)





# Specification

- Volt:220V(single-phase)
- 2. Watt:0.27KW
- 3. Outline size: 270X270X650mm
- 4. Sealing speed:400~500times/per hour
- 5. Machine weight:8.5kg
- 6. Sealing diameter: Ø70mm、 Ø76mm 、 Ø90、 Ø95mm Maximum cup height:180mm
- 7. The body sprayed with blue, thickness of plate is 0.6~3mm, firm and reliable.
- 8. It has small size, comprehensive functions, efficiency and energy-saving. It adopts locating pin to prevent damage of serrated knife and keep it durable. Low price, easy operation, unique double-cups structure for freedom match.

**MANUAL CUP  
SEALER WY860**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- WY-862-17 Semi-auto sealing machine
- Volt:220V(single-phase)
- Watt:0.27KW
- Outline size: 310X440X683mm
- Sealing speed:400~500times/per hour
- Machine weight:9kg
- Sealing diameter: Ø70mm、Ø76mm 、Ø90、Ø95mm  
Maximum cup height:180mm
- The body sprayed with blue(WY-862-12 sprayed with orange), thickness of plate is 0.6~3mm, firm and reliable.
- It has small size, comprehensive functions, efficiency and energy-saving. It adopts locating pin to prevent damage of serrated knife and keep it durable. Low price, easy operation, unique double-cups structure for freedom match.
- The cup sealing machine can only automatically roll the film, other operations are manual.

**SEMI AUTO CUP  
SEALER WY  
862-17**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- WY-680 Auto Cup Sealing machine
- Volt:220V(single-phase)
- Watt:0.35KW
- Outline size: 32.8X22.8X64cm
- Machine weight: 17.3Kg
- Sealing diameter: ealing diameter: Ø70mm、Ø76mm 、Ø90、Ø95mm Maximum cup height:180mm
- The body sprayed with flashing silver, thickness of plate is 0.6~3mm,firm and reliable
- Internal equipped with automatic roll film induction and no injured knife induction. Its function is that even if improper operation, the machine will not press cup or roll film to guarantee not to damage the serrated knife. Advanced technology, novel style, reasonable structure, flexible operation, save the energy and time, suitable for small food factory, beverage factory and catering enterprises.
- Unique double-cups structure for freedom match. Pearl milk tea sealing machine is a kind of cup sealing packing machine for beverage.

**AUTOMATIC  
CUP SEALER  
WY 680**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Voltage Power: 110V-220V 50/60Hz 40W
- Maximum Runoff: 2000ml/M (Water)
- Filling Range: 5ml-2000ml
- Optimal Filling Range: 5ml-1000ml
- Filling Precision:  $\pm 2\%$

**LT-130 SINGLE  
HEAD FILLING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



## Specification

- Voltage Power: 110V-220V 50/60Hz 40W
- Maximum flow :3.2 L/min
- Filling Range: 5ml- 4000ml
- Optimal Filling Range: 5ml-2000ml
- Filling Precision:  $\pm 2\%$

**LT 130 DOUBLE  
HEAD FILLING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model DGYF-S500A
- voltage 110V/220V 50HZ/60HZ
- Power 500W
- Capacity 0-50pcs/min
- Sealing Diameter 20-100mm
- Machine weight 5kg
- Machine size 340\*290\*150mm

**DGYF S 500 A  
INDUCTION  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model DGYF-200
- voltage 110V/220V 50HZ/60HZ
- Power 500W
- Capacity 0-50pcs/min
- Sealing Diameter 20-80mm
- Machine weight 4kg
- Machine size 280\*230\*115mm

**DGYF 200  
INDUCTION  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model DGYF-S500C
- voltage 110V/220V 50HZ/60HZ
- Power 600W
- Capacity 0-50pcs/min
- Sealing Diameter 60-130mm
- Machine weight 5kg
- Machine size 340\*290\*150mm

**DGYF S 500 C  
INDUCTION  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)





# Specification

- Model LGYF-1500A-I
- voltage 220V 50/60HZ
- Power 1.5KW
- Capacity 0-10m/min
- Sealing Diameter 20-50mm
- Suitable Height of bottles 40-200mm
- Machine weight 38kg
- Machine size 1150\*480\*400mm

**LGYF 1500  
INDUCTION  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)





# Specification

- Model LGYF-2000AX
- voltage 220V 50/60HZ
- Power 1.5KW
- Capacity 0-12m/min
- Sealing Diameter 20-130mm
- Suitable Height of bottles 40-400mm
- Machine weight 72kg
- Machine size 1550\*550\*1350mm

**LGYF 2000  
INDUCTION  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Input power AC220V 10% 50/60Hz
- Input electrical current 10A
- Output electrical current static state 2A dynamic state 10A
- Working frequency 75 85KHz
- Output power 1200W
- Protection degrees IP21
- Sealing diameter :  $\phi$  20mm ~  $\phi$  80mm
- Height of bottle 20 300mm
- Sealing speed 0 10M/min PS Because of the bottle materiel or the mouth of bottle diameter, sealing speed will be a little different. We use a bottle made by PE , the diameter is  $\phi$  33mm for test, the speed is 200 bottle per minute.
- Total maximum load weight 3Kg
- Shell Stainless steels
- Size 1120X470X590mm


LX6000  
CONTINUOUS  
INDUCTION  
SEALER SS  
BODY

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

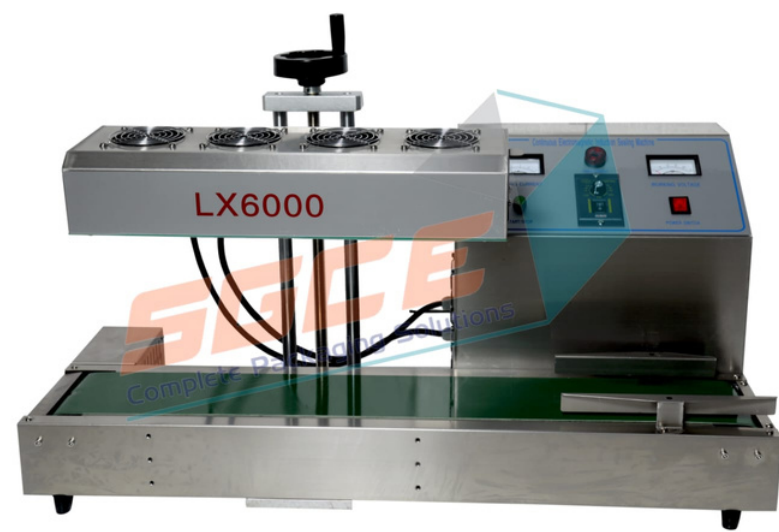

# Specification

- Model name - MT - 30 round bottle labelling .
- Label size - 30 times / min
- Label accuracy - 0.5mm
- Min label roll inner dia - 75mm
- Max label roll outer dia - 150 mm
- Product size - 15 mm to 120 mm dia
- Label size - L 10- 300 mm / W 10- 110mm
- Machine size - 380\*200\*270
- Weight - 4.5 kg


**MT-30 MANUAL  
LABELLING  
MACHINE**

## Contact us


Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

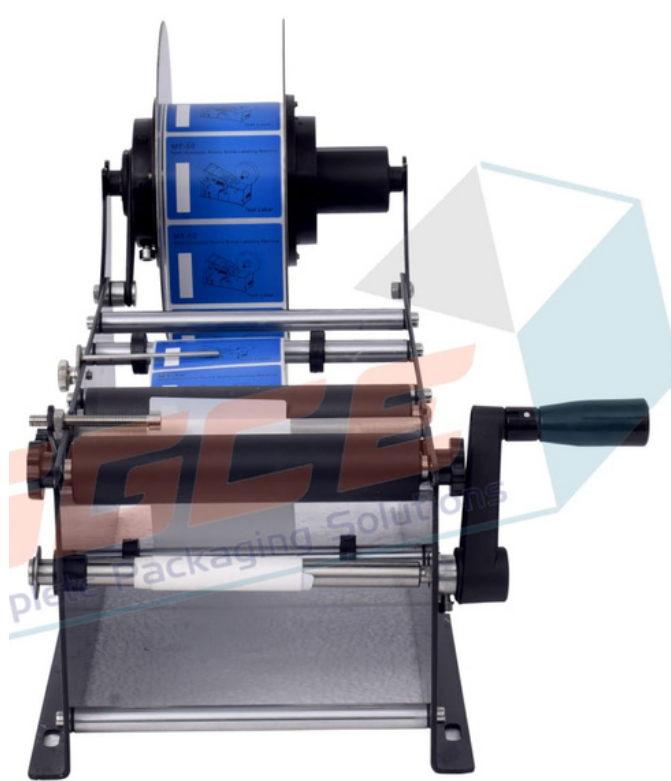

# Specification

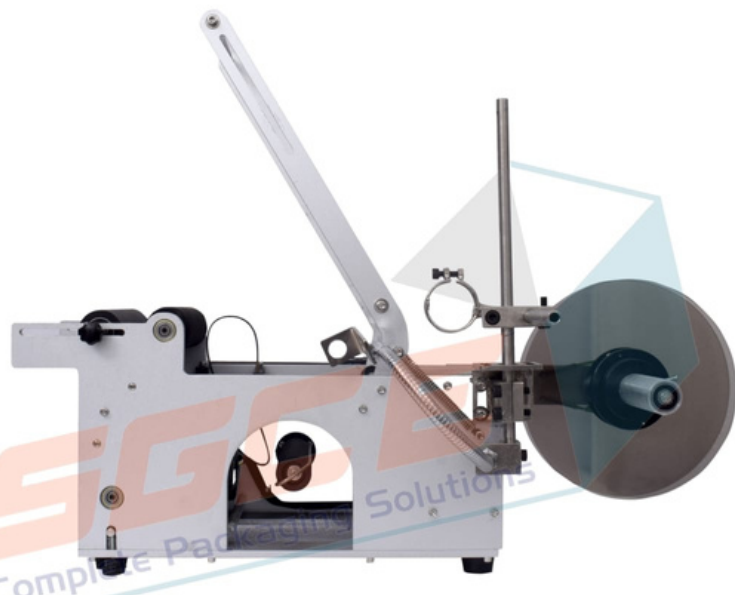

- Model MT-50/MT-50C
- Voltage AC220V/50hz
- Power 120W
- Labeling speed 25-30pcs/min
- Precision  $\pm 0.5$
- Label roll diameter 75-250mm
- Bottle diameter 20-120mm
- Max Label size W150\*L230
- Machine size 650\*450\*450mm
- Machine weight 25kg
- efficiency:  $\leq 50$ pcs/min
- precision:  $\pm 1$ mm
- Applicable bottles of diameter:  $\Phi 10-150$ mm
- label roll: external diameter 300mm inner diameter: 75mm
- Label size: width 8-150mm length 15-210mm
- Power supply: 220 V,50HZ 120W
- Machine size: 650 (L)  $\times$ 450 (W)  $\times$ 450 (H) mm
- Machine weight: 20kg


**MT 50 SEMI  
AUTO ROUND  
BOTTLE  
LABELLING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

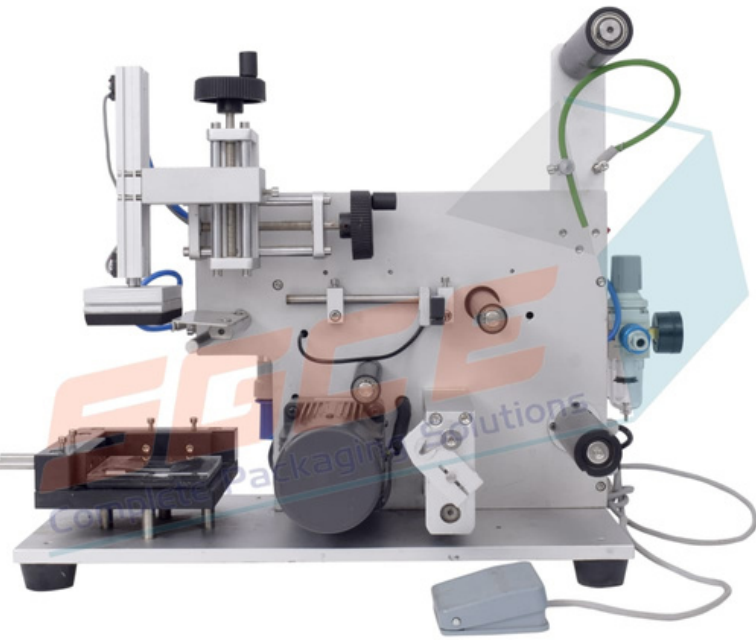

# Specification

- efficiency: 20-40 pes/min
- precision: 1mm
- label roll: external diameter 300mm inner diameter: p 75mm
- Label size: width 10-130mm length 10-100mm
- Power supply: 220 V, 50HZ, 200W
- air supply: 0.4-0.6MPa
- Machine size: 300x200x400mm
- Machine weight: 25kg

**MT 60 SEMI  
AUTO  
LABELLING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Poster speed 0-100 PCS/min
- Bottle diameter  $\Phi$  20 -  $\Phi$  100mm
- Bottle Height 25-300mm
- Label size wide 10-140mm
- Label size length 15-200mm
- (Contains Label at the bottom of the paper)
- Labeling precision + 1mm (depending on the bottle degree, perpendicular round)
- Labeling Maximum diameter: $\Phi$  200mm
- Power supply AC110V / 220V. 500W
- Machine size 1430\*1050\*940mm
- Weight 100kg
- Printing device HP 260Q -(optional)

**MT-130  
DESKTOP  
AUTOMATIC  
ROUND BOTTLE  
LABELING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Filling range: 5-50g
- Filling accuracy:  $\pm 1\%$
- Working way: manual
- Hopper volume: 10KG
- Shape dimension: 270×270×710mm
- weight: 13KG



**A03 MANUAL  
FILLER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model PSF-350
- Voltage AC220V/50Hz 110V/60Hz
- Power 500w
- Sealing length 350mm
- Sealing width 8mm
- Heating time 0.2-2S
- Machine weight 18kg



**PSF 350 PEDAL  
SEALER  
DOUBLE SIDE  
HEATING**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model PSF-450
- Voltage AC220V/50Hz 110V/60Hz
- Power 1000W
- Sealing length - 450mm
- Sealing width 8mm
- Heating time 0.2-2S
- Machine weight 20kg



**PSF 450 PEDAL  
SEALER  
DOUBLE SIDE  
HEATING**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model PSF-650
- Voltage AC220V/50Hz 110V/60Hz
- Power - 1200W
- Sealing length -650mm
- Sealing width 8mm
- Heating time 0.2-2S
- Machine weight -24kg



**PSF 650 PEDAL  
SEALER  
DOUBLE SIDE  
HEATING**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model:BS-3020
- Power:4.5kw
- Voltage:380V/50hz
- Tunnel size:800\*300\*200mm
- Max conveyor loading: 5kgs
- Conveyor speed:0-10m/min

**BS3020  
THERMAL  
SHRINKING  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model DSH4020S(Net and chain)  
DSH4020S(Net and chain)
- Voltage 220V,50~60Hz 380V,50~60Hz
- Power 6.9kw 6.9kw
- Speed 0~10m/min 0~10m/min
- Tunnel size L780\*W400\*H200  
L780\*W400\*H200
- Weight loading 5Kg 5Kg
- Machine size L990\*W570\*H700  
L990\*W570\*H700

**DSH 4020S  
THERMAL  
SHRINK  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model:BS-G4525
- Voltage:380V/50HZ
- Power:6.5KW
- Speed:0-12m/min
- tunnel size :910\*450\*250
- machine size:1200\*660\*1080
- conveyor loading 5kg

**BS-G450  
THERMAL  
SHRINKING  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model DBC800
- Voltage 220V, 50~60HZ
- Power 0.12KW
- Max wrapping size 900×900×900
- Turntable speed 30r/min
- Max loading ≤80Kg
- Machine size L1150×W600×H1884



**DBC800  
STRETCH  
WRAPPING**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model DBC800S DBC800SDY (Pre-stretch)
- Voltage 220V, 50~60HZ
- Power 0.12KW 0.37KW
- Max wrapping size 900×900×900
- Turntable speed 30r/min
- Max loading ≤80Kg
- Machine size L1150×W600×H2360  
L1337×W600×H2360



**DBC800S  
STRETCH  
WRAPPING**


## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



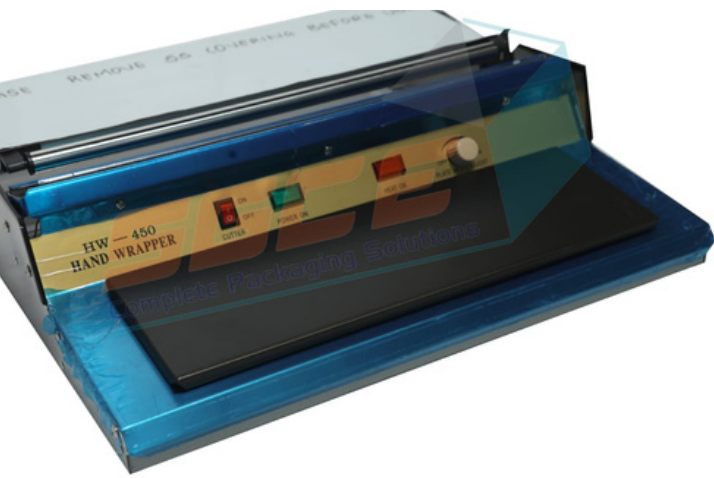

# Specification

- Model: HW-450
- Blade length: 440mm
- Voltage: 220V 50Hz
- Power: 270W
- Temperature: 55 °C -140 °C
- Weight: 8kg
- Dimensions: 540\*680\*220mm

**HW-450 HAND  
WRAPPER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Voltage - Ac 220 v / 50 hz
- Motor power - 370 w
- Sealing power- 200 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars - 1 nos
- Chamber DIMENSION -  
L(325)\*W(285)\*H(50)
- Sealing length- 260 mm
- Sealing width- 10mm
- Vacuum pump rate- 6.5m<sup>3</sup>/h
- Net weight - 20 kg
- Material of vacuum chamber - SS201



**DZ - 260/A3  
TABLE TOP  
TYPE VACUUM  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Voltage - Ac 220 v / 50 hz
- Motor power - 370 w
- Sealing power- 200 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars - 1 nos
- Chamber DIMENSION -  
L(390)\*W(285)\*H(50)
- Sealing length- 260 mm
- Sealing width- 10mm
- Vacuum pump rate- 6.5m<sup>3</sup>/h
- Net weight - 29kg
- Material of vacuum chamber - SS201

**DZ 260/ PD  
TABLE TOP  
TYPE VACUUM  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



**FZ 1000 SWM  
10-1000GM**

# Specification

- Model: FZ-1000
- Voltage : 220V 50HZ
- Power : 100W
- Filling volume: 1-999g
- Filling speed: 10-30pcs/min
- Filling accuracy :  $\pm 0.02g$
- Specification of Hopper: length  
24.5cm,width16cm ,depth 21cm
- Machine Dimension: 38\*25\*80cm
- Weight : 14kg

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model: FZ-5000
- Voltage : 220V 50HZ
- Power : 200W
- Filling volume:10~5000g
- Filling speed: 5~10pcs/min  
(depending on different materials  
and different packing weights)
- Filling accuracy :  $\pm 2g$  (depending on  
different materials and different  
packing weights)
- Machine Dimension:  
580\*380\*1030mm
- Machine Weight : 42kg

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



**FZ 5000 SMALL  
WEIGHING  
MACHINE**

# Specification

- Name: Intelligent weighing machine
- Model:FZ-100
- Working voltage: 220V or 110V
- Working Power: 150W
- Filling:2-50g
- Precision:1g
- Speed: 5-15times/minute
- Speed rating: adjustable (fast, middle ,slow)
- Appearance of the material: 201 Stainless steel
- Internal material:201 Stainless steel
- Machine size:400\*280\*\*530MM
- Weight:10Kg



**FZH 100  
WEIGHING  
MACHINE ONLY  
HEAD 10-100  
GMS**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model DZ(Q)400-2D
- Power Source 220V~240V/50Hz
- Total power 1500W
- Sealing size 400×10mm
- Packing speed 1~4 times /min
- Chamber size 420×440×80mm
- Dimension 500×550×1050mm
- Weight 105Kg

**DZ400-2D SINGLE  
CHAMBER  
VACUUM  
MACHINE ANALOG  
SWITCH**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model DZ(Q)500-2D
- Power Source 220V~240V/50Hz
- Total power 1500W
- Sealing size 50×10mm
- Packing speed 1~4 times /min
- Chamber size 525×525×80mm
- Dimension 600×650×1050mm
- Weight 120Kg

**DZ500-2D SINGLE  
CHAMBER  
VACUUM  
MACHINE ANALOG  
SWITCH**

## Contact us

Vasai East, Kaman, Maharashtra  
401208


091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model DZ300A
- Vacuum 0.035Mpa
- Sealing width 40-280mm
- (Wider bags can be closed by sealing the opening in several steps)
- Power supply AC220V 50-60HZ
- Heat seal time Digital setting & auto control
- Size of unit 370\*140\*73mm
- Weight 2.5kg

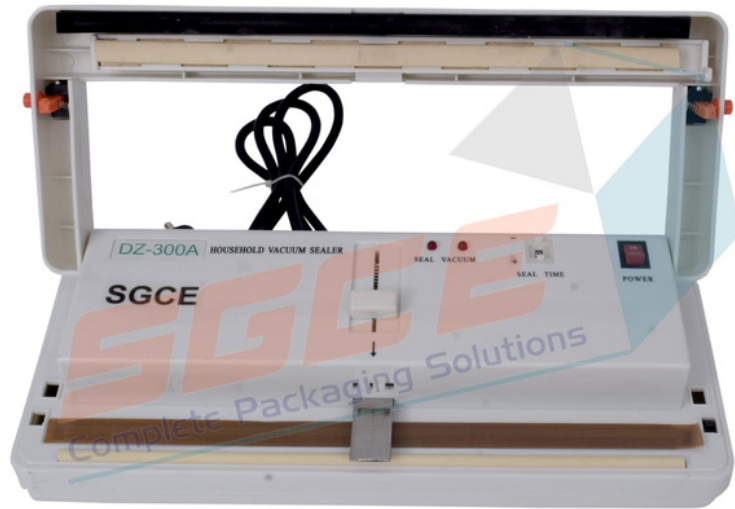

**DZ-300A  
HOUSEHOLD  
VACUUM SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Voltage - Ac 220 /50 hz
- Motor power - 900 w
- Sealing power - 500 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars - bars
- Chamber dimensions - 435\*420\*75 mm
- Sealing length- 400 mm
- Sealing width - 10 mm
- Vacuum pump rate- 20 m/h
- Machine dimension - 540\*450\*950mm
- Machine weight - 62 kg

**DZ-400/2E SINGLE  
CHAMBER  
VACUUM  
PACKAGING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Voltage - AC 220/50
- Motor power - 900 w
- Sealing power- 750 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars - 2 bars
- Chamber dimension - 525 \* 525 \* 75 mm
- Sealing length- 500 mm
- Sealing width - 10 mm
- Vacuum pump rate- 20 m / hr
- Material for vacuum chamber - stainless steel 20l.
- Net weight - 80 kg

**DZ- 500 /2E  
SINGLE CHAMBER  
VACUUM  
PACKAGING  
MACHINE .**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Voltage - Ac 380v / 50 hz
- Motor power - 2000w
- Sealing power - 800 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars for each chamber - 2 pcs
- Chamber dimension - 550 \* 520\*100 mm
- Sealing length- 500 mm
- Sealing width - 10 mm
- Vacuum pump rate- 20 m / hr
- Material of vacuum chamber - stainless steel 201
- DIMENSION - 1220\*570\*920
- Net weight - 170 kg

Distance between two sealing bars - 440 mm

**DZ - 500/2SA  
DOUBLE  
CHAMBER  
VACUUM  
PACKAGING  
MACHINE.**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Voltage - Ac 380v / 50 hz
- Motor power - 2000w
- Sealing power - 1000 w
- Ultimate vacuum pressure - 1 kpa
- No of sealing bars for each chamber - 2 pcs
- Chamber dimension - 650 \* 520\*100 mm
- Sealing length- 600 mm
- Sealing width - 10 mm
- vacuum pump rate- 20 m / hr
- Material of vacuum chamber - stainless steel 201
- DIMENSION - 1400\*580\*920
- Net weight - 188 kg

Distance between two sealing bars - 440 mm.

**DZ - 600 /2SA  
DOUBLE  
CHAMBER  
VACUUM  
PACKAGING  
MACHINE .**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model BS-A450
- Commodity thermal shrink tunnel
- Voltage 220-240V/50-60HZ
- Heater Power 9kW
- Conveyor speed 0-10m/min
- Workroom size(L\*W\*H) 800\*450\*250mm
- Max conveyor loading 15kg
- Machine weight 100kg
- Packing size 1310 x 720 x 880mm
- Shrink film POF,PVC,PP

**BS4525A  
THERMAL  
SHRINKING  
PACKAGING  
MACHINE WITH SS  
HEATER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Specifications
- Model - GCG-A
- Filling type - one nozzle
- Air supply - 400 L /min
- Filling range - 10 ml - 100 ml .

**GCG-A PASTE  
FILLER ( 10-  
100 ML )  
SINGLE HEAD**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GCG-A
- Filling type - one nozzle
- Air supply - 400 L /min
- Filling range - 100ml - 1000 ml .

**GCG- A PASTE  
FILLER (100ML  
- 1000ML)  
SINGLE HEAD .**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification



- Model - GCG-A
- Filling type - one nozzle
- Air supply - 400 L /min
- Filling range - 50 ml - 500 ml.

**GCG-A PASTE  
FILLER ( 50-  
500 ML )  
SINGLE HEAD**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GCG-A
- Filling type - double nozzle
- Air supply - 600 L /min
- Filling range - 100ml - 1000 ml . ( Single nozzle )

**GCG- A PASTE  
FILLER (   
100ML -  
1000ML )  
DOUBLE HEAD**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GCG-A
- Filling type - double nozzle
- Air supply - 600 L /min
- Filling range - 50ml- 500ml . ( Single nozzle )

**GCG-A PASTE  
FILLER ( 50ML  
- 500 ML )  
DOUBLE HEAD**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GC-A
- FILLING TYPE - One nozzle
- Air supply - 400L/Min
- Filling range - 10 - 100 ml

**GC-A LIQUID  
FILLER ( 10 -  
100 ML )**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GC-A
- Filling type - single nozzle
- Air supply - 400 L /min
- Filling range - 50 ml - 500 ml

**GC-A LIQUID  
FILLER ( 50 ML  
- 500 ML )  
SINGLE HEAD**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Model - GC-A
- Filling type - single nozzle
- Air supply - 400 L /min
- Filling range - 100 ml - 1000 ml

**GC- A LIQUID  
FILLER (  
100ML -  
1000ML )  
SINGLE HEAD .**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Model PFS-200
- Power source AC220V/50HZ 110V/60HZ
- Power 330W
- Sealing length 200mm
- Sealing width 3mm
- Heat time 0.2-1.3 sec
- Machine size 320\*80\*150mm
- Machine weight 2.8KG

**PFS 200 HAND  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model PFS-300
- Power source AC220V/50HZ 110V/60HZ
- Power 430W
- Sealing length 300mm
- Sealing width 3mm
- Heat time 0.2-1.3 sec
- Machine size 450\*85\*180mm
- Machine weight 4.5KG

**PFS 300 HAND  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)





# Specification

- Model PFS-400
- Power source AC220V/50HZ 110V/60HZ
- Power 600W
- Sealing length 400mm
- Sealing width 3mm
- Heat time 0.2-1.3 sec
- Machine size 550\*85\*180mm
- Machine weight 5.2KG

**PFS 400 HAND  
SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model TDY300C
- Operating mode electromotive
- Working speed  $\leq 3600$ times/hour
- Printing size  $< 50 \times 50$ mm<sup>2</sup>
- Printing height  $\leq 380$ mm
- weight 21kg
- Dimensions(L x W x H) 435 x 405 x 560mm

**TDY- 380C  
ELECTRIC PAD  
PRINTER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification



- Output power - 0.1 to 0.5kw
- Sealing dia - 20 - 120 mm
- Dimensions - 310 260 130mm
- Weight - 3.5 kg

**MODEL - DGYF  
600C**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Size \*\*: L1400 mm×W620 mm×H1435 mm
- Packing size \*\*: L1500 mm×W700 mm×H1600 mm
- Packing size Height of worktable: 750 mm
- Load bearing capacity: 80 kg
- Net weight \*\*: 150 kg
- Strap width: 9mm-15 mm
- strap reel: Inner diameter of paper core with ring 200 mm-210 mm
- Outer diameter of belt ring 400 mm-450 mm Band width 170mm -190 mm
- Binding speed \*\*:  $\leq 2.5$  S/strap
- Binding specification: Minimum package size: W80 mm × H 60 mm, maximum within the frame
- Bonding method: Hot-melt method
- Bonding method: Bottom bonding, bonding surface  $\geq 90\%$ , bonding position deviation  $\leq 2$ mm
- Binding tightness: 0-50 kg
- Power : 400W, 3A
- Voltage : IP, 220V, 50-60Hz (Standard reference machine nameplate)
- Working noise:  $\leq 75$ dB(A)
- Adjustable options: Frame specification, bandwidth
- instructions: \*\*Standard frame W 800 mm × H 600 mm
- \*\* Change at any time without notice

**DBA-150  
AUTOMATIC  
STRAPPING  
MACHINE**



# Specification

- Power - 220v /50 hz
- Electric power - 1kw
- Air extraction speed - 4.3 m <sup>^3</sup> /hr
- Air inflation speed - 0.8 mpa
- Sealing size - 500 mm \* 8 mm
- Over all size - 600mm\*340mm\*430mm
- Weight - 40 kg

**MODEL NAME  
- DZ 500T**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Power - 220v/50hz
- Electric power - 1.5 KW
- Air extraction speed - 6.5 m<sup>3</sup>/hr
- Air inflation speed - 0.8 mpa
- Sealing speed - 600mm \* 8 mm
- Over all size - 700mm \* 450mm\* 950mm
- Weight - 60 kg.

**MODEL-  
DZ600A**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- Power source
- 3Phase,200V-240V/380V-/200V-240V,50Hz/60Hz
- 1phase - 100V- 120V -240V,50 HZ/60 hz
- Strap width
- 9,10,12,12.7,15.5,18,19mm
- Coil core ID.200,230,280,406mm adjustable
- Coil width 190 – 230mm
- Strapping speed
- 23times/min
- Package size
- min. 100mmW x 30mmH.
- max. as arch inner size
- Sealing method
- heat-melt
- Strapping tension strength
- min.5Kgs, max.80Kgs
- Net weight
- 240Kgs
- Dimension
- 1412mmW x 600mmL x 1545mmH

**MODEL -  
DBA200**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification



- POWER SUPPLY - AC220V /60 HZ
- MAX PACKAGING DIMENSION - 500(W) \* 500(H) MM
- MIN PACKAGING DIMENSION - 200 (W) \* 160( H) \* 200 (L) mm
- SPEED - 18M/MIN
- WIDTH OF ADDHESIVE TAPE - 48MM 60MM
- MACHINE SIZE - 2685(L) \* 900(W) \*1400-1600 (H) MM
- MACHINE WEIGHT - 180 KG.

**MODEL NAME  
- FXJ5050Z**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification



- Power source
- AC220V/50HZ
- Sealing capacity
- about 1,000 standard cases per hour
- Width of adhesive tape
- 36,48,60mm
- Way of transmission
- Up & down
- Max. sealing dimensions (W\*H)
- 500\* 600mm
- Min. sealing dimensions (W\*H)
- 140\*150mm
- Machine size
- 1815\*720\*1610

**MODEL  
DQFXA6050**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Working voltage: 220V or 110V
- Working Power: 150W
- Filling: 50 to 500 GM's
- Precision: 1g
- Speed: 5-15 times/minute
- Speed rating: adjustable (fast, middle, slow)
- Appearance of the material: 201 Stainless steel
- Internal material: 201 Stainless steel
- Weight: 18 kg

**INTELLIGENT  
WEIGHING  
MACHINE  
MODEL:FZ-500**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Power Source
- 220V/50-60HZ
- Capacity
- 0-30 packs/minute Total Power
- 3 Kw
- Max. Sealing Size
- L550\*W450mm
- Max. Packing Size
- L500\*W400\*H120mm
- Sealing Temp.
- 180-250°C, according to film thickness
- Sealing Time
- 0-3 Sec, normally 0.8-1.2 Sec
- Thickness of Film
- 0.015-0.10mm
- Packing Material
- POF, PE, PVC
- Air Pressure
- 5 Kg/cm<sup>2</sup>
- Machine Size
- L1795\*W985\*H1570 mm
- Weight
- 320 Kg

**MODEL  
DQL-5545 AUTO L  
SEALER + SM 4525  
SHRINK TUNNEL .**


## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

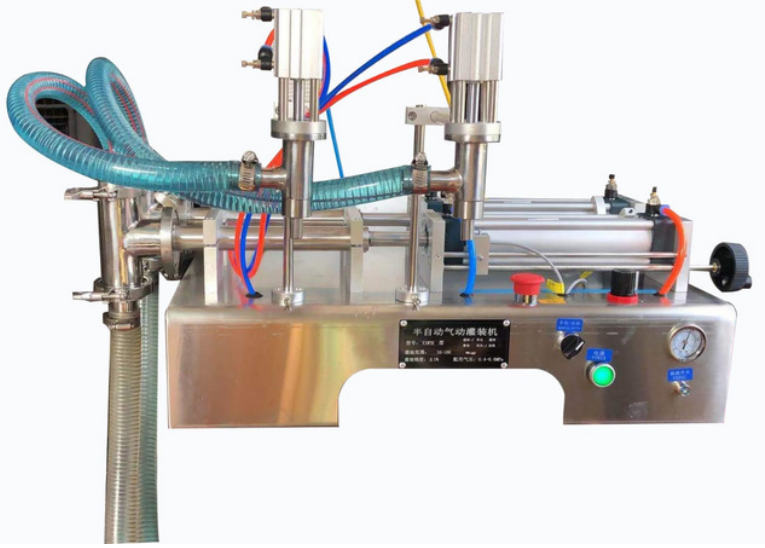

- **FILLING TYPE - Double nozzle**
- **Air supply - 400L/Min**
- **Filling range - 10 - 100 ml**

**GCG-A2 DOUBLE  
HEAD LIQUID  
FILLER MACHINE.**


## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

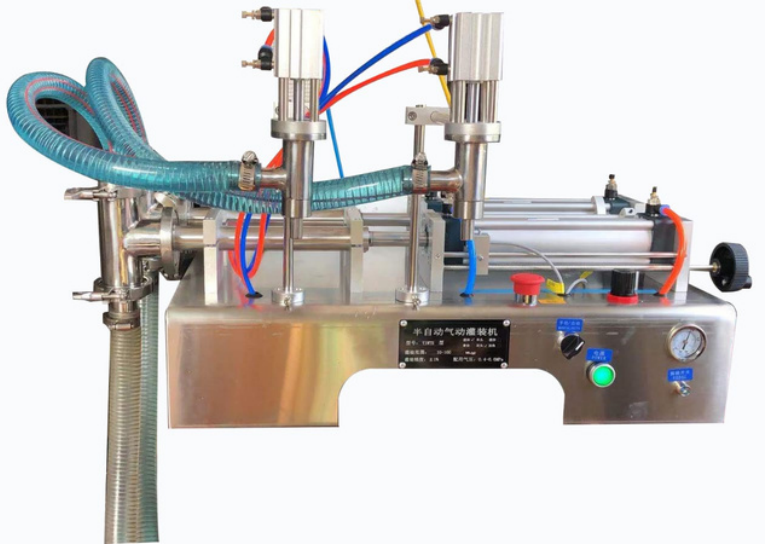

- **FILLING TYPE - Double nozzle**
- **Air supply - 400L/Min**
- **Filling range - 50- 500 ml**

**MODEL - GCG-A2  
DOUBLE HEAD  
LIQUID FILLER  
MACHINE.**


## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

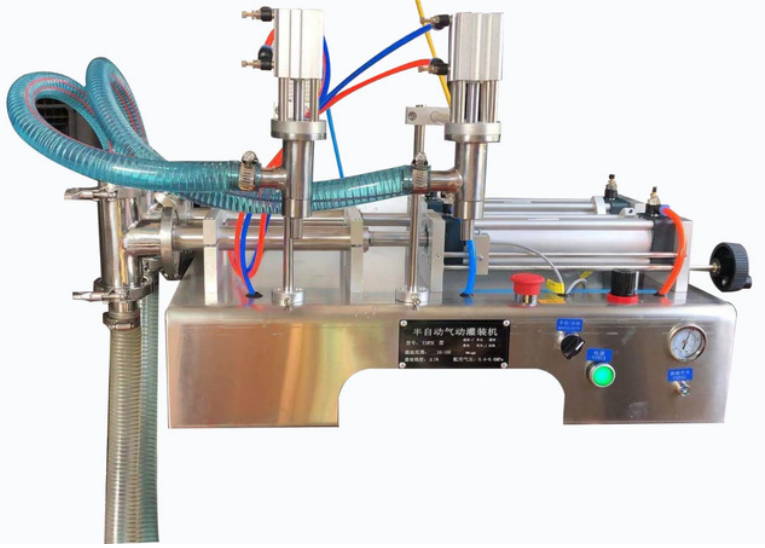

- **FILLING TYPE - Double nozzle**
- **Air supply - 400L/Min**
- **Filling range - 100 - 1000 ml**

**MODEL - GCG-A2  
DOUBLE HEAD  
LIQUID FILLER  
MACHINE.**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Voltage - AC 220v /50 Hz
- Power- 1.5 KW
- Max packaging size - 550 \*400\*380 (mm)
- Max sealing length - 650mm
- Working air pressure - 5-7(kg/cm<sup>2</sup>)
- External dimension
  - - 925\*1040\*1920mm
- Net weight - 300 kg
- Shrink tunnel specifications
  - Voltage - AC 220v /60 Hz
  - Power - 23 kw
  - Load - 40 kg
  - Conveyor speed - 0-8 m/min
  - Tunnel size - 1450\* 550 \*1600 mm
  - External dimension - 2550\* 850\* 1600 mm
  - Net weight - 300 kg

**MODEL NAME - HL  
TF - 6540SA WITH  
BS 5540M**



# Specification

- Frequency:1300h/bag(drink, bean milk, milk,)
- Capacity:200-500ml/bag
- Precision:±1%
- Film width:320mm
- Power:motor:0.55KW
- Vertical sealing:0.3KW
- Horizontal sealing:0.5KW
- Sterilize light:15W
- Voltage:AC220V/50Hz or AC 380V (three phases)
- Weight:335Kg
- Dimension:850(L)×750(W)×1600(H) mm

**MODEL NAME - AS  
1000 LIQUID  
FILLER  
PACKAGING  
MACHINE .**





# Specification

- Operation Full Automatic
- Voltage: 110v or 220v
- power: 500W
- Bag size 0-80mm(W),0-150mm(L)
- Sealing type 3 sides seal
- Film thickness: 0.5mm-0.8mm
- Precision: 0.3G
- Dimension: 430\*510\*1400MM
- Weight: 55KG

**PRODUCT MODEL:  
FZL-100**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Nozzle - TIJ 2.5 thermal foaming
- CPU - quad core 1.4 HZ
- Language - English , chinese , Turkish , Arabic Korean , Italian
- DIMENSION - 130mm 128mm \* 242 mm
- Net weight - 1 kg
- Printing height 12.7 mm
- Printing distance - 2.5 mm
- Print content - text , time , batch no , serial no, logo ,QR code
- Defination - maximum 600DPI
- Storage - more than 1000 messages
- Printing length - 2000 character for each message , no limitation
- Printing speed - 70 m / min
- Ink colour - black , red , blue , green
- External interface - usb , photocell
- Power consumption - less then 5w
- Working environment - TEMPERATURE 0- 38 degrees
- Printing material - board carton , pipe ,cable , metal , plastic product , fiber board .

## P100 HAND HELD THERMAL INKJET PRINTER



# Specification

- Voltage 110/220V 50-60Hz
- Power 500W
- Sealing speed 0-12m/min
- Sealing width 6-12mm
- Temperature range 0-300°C
- Max. conveyor loading 3kgs
- Printing category Steel wheel printing
- Weight Net.23kg
- Machine size 820X400X300mm

**FR-900S  
CONTINUOUS  
BAND SEALER MS  
BODY**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Voltage 110/220V 50-60Hz
- Power 500W
- Sealing speed 0-12m/min
- Sealing width 6-12mm
- Temperature range 0-300°C
- Max. conveyor loading 3kgs
- Printing category Steel wheel printing
- Weight Net.23kg
- Machine size 820X400X300mm

**FR-900S  
CONTINUOUS  
BAND SEALER S.S  
BODY**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Voltage 110/220V 50-60Hz
- Power 500W
- Sealing speed 0-12m/min
- Sealing width 6-12mm
- Temperature range 0-300°C
- Max. conveyor loading 3kgs
- Printing category Steel wheel printing
- Weight Net.23kg
- Machine size 820X400X300mm

**FR900V  
CONTINUOUS  
BAND SEALER MS  
BODY WITH  
VERTICAL TYPE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- VOLTAGE - 220V / 50HZ
- MOTOR POWER - 50W
- SEALING POWER - 300×2 W
- SEALING SPEED - 0- 12 M/MIN
- TEMPERATURE RANGE - 0 TO 400 DEGREES
- SEALING WIDTH - 12 MM
- MAX LOADING OF CONVEYOR - 3 KGS
- DIMENSION - 840× 380 × 320 /450
- WEIGHT - 22 KGS - 28 KGS

**HL MS  
HORIZONTAL  
BAND SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification



- VOLTAGE - 220V / 50HZ
- MOTOR POWER - 50W
- SEALING POWER - 300×2 W
- SEALING SPEED - 0- 12 M/MIN
- TEMPERATURE RANGE - 0 TO 400 DEGREES
- SEALING WIDTH - 12 MM
- MAX LOADING OF CONVEYOR - 3 KGS
- DIMENSION - 840× 380 × 320 /450
- WEIGHT - 22 KGS - 28 KGS

**HL SS  
HORIZONTAL  
BAND SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification

- VOLTAGE - 220V / 50HZ
- MOTOR POWER - 50W
- SEALING POWER - 300×2 W
- SEALING SPEED - 0- 12 M/MIN
- TEMPERATURE RANGE - 0 TO 400 DEGREES
- SEALING WIDTH - 12 MM
- MAX LOADING OF CONVEYOR - 3 KGS
- DIMENSION - 840× 380 × 320 /450
- WEIGHT - 22 KGS - 28 KGS

**HL MS VERTICAL  
BAND SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)







# Specification

- VOLTAGE - 220V / 50HZ
- MOTOR POWER - 50W
- SEALING POWER - 300×2 W
- SEALING SPEED - 0- 12 M/MIN
- TEMPERATURE RANGE - 0 TO 400 DEGREES
- SEALING WIDTH - 12 MM
- MAX LOADING OF CONVEYOR - 3 KGS
- DIMENSION - 840× 380 × 320 /450
- WEIGHT - 22 KGS - 28 KGS

**HL SS VERTICAL  
BAND SEALER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- **MODEL:KH-90**
- **POWER:240V50HZIPH**
- **CABINET CLOSE TYPE**
- **CABINET METAL SHEET : 1.2 MM THICK**
- **TOP COVER: 1.5 MM THICK STAINLESS STEEL 430**
- **COLOR: MACHINE BODY DARK VIOLET**
- **FRONT PANEL BLUE (RAL 5018)**
- **P.P.STRAP:12MM\*0.55MM (ADJUSTABLE)**
- **STEEL FLANGE**
- **MATEL PACKAGE STOP**
- **CONTROL PANEL: FEATHER TOUCH BUTTON**
- **WITHOUT POWER CUT SWITCH**
- **MECHANISM OUTSIDE TENSION**
- **MAGNETIC REED SWITCH TYPE TENSION DETECTOR**
- **COPPER WIRE MOTOR**
- **STEEL ROLLER WITH AL BEARING HOUSING**
- **WITH CE CERTIFICATE**
- **SERIAL NUMBER: 22070001-22070135**

**KH - 90 BOX  
STRAPPING**

# Specification

- 1. voltage: AC220V±10%、 50HZ
- 2. power: 50W
- 3. Cap diameter:  $\Phi$ 10mm- $\Phi$ 50mm
- 4. height of bottle: 80mm-220mm  
(less than 80mm can customize)
- 5. weight: 32Kg
- 6. machine size: 520×300×530 (mm)



**DDX450 SEMI-AUTO CAPPER**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- 1. the technical parameters:
- 1, Power: AC220V  $\pm$  10% 50 / 60Hz
- 2, power: 80 (W)
- 3, Work: Electric Capping
- 4, model forms: Handheld
- 5, capping diameter:  $\phi$  10 ~  $\phi$  50 (mm)
- 6. Production capacity: depending on proficiency
- 7, for caps: free
- 8, machine size: 7 × 7 × 30 (cm)

**XP-1 HAND HELD  
CAPPING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)



# Specification

- Model JGS-880 JGS-980
- Power 220V/50HZ
- Capacity 800 bottles/hour 1000 bottles/hour
- Caliber 20-35mm 20-35mm
- Bottle height 70-330mm 20-350mm
- Machine Weight 72kg 82kg
- Machine Dimension 605\*300\*970mm  
700\*340\*1260mm

**JGS 980 MULTI  
PURPOSE  
LOCKING &  
CAPPING  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- TAPE USE - 3 INCH TAPE
- MANUAL OPERATION.


**DY - 48 TAPE  
DISPENSER  
MACHINE**

## Contact us

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

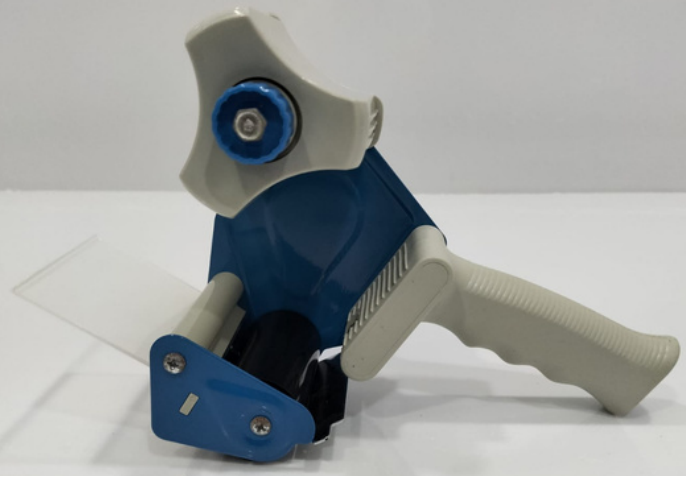

# Specification

- TAPE USE - 3 INCH TAPE
- MANUAL OPERATION.

**DY- 75 TAPE  
DISPENSER  
MACHINE**

## **Contact us**

Vasai East, Kaman, Maharashtra  
401208

091561 88774

[www.sgcepackagingmachines.com](http://www.sgcepackagingmachines.com)

# Specification



- Nozzle - TIJ 2.5 thermal forming CPU cord core 1.4 hz
- Language - English ( total 20 language)
- Touchscreen - 4.3 inches
- Print height - 12.7 mm
- Print distance - 1mm to 5 mm
- Print content - text, date , batch no , table , liner barcode and QR code
- Defination - 300 to 600 dpi
- Storage - 100 messages
- Printing length - 2000 characters of 5mm for each message
- Printing speed - 30 to 50 Mtr / hr
- Ink color - black
- Ink cartridge - solvent based 42ml (approx 25 to 28 lakh characters of 3 mm can be printed by 300dpi.
- Cartridge storage - AC room ( better ) or normal room temperature
- External interface - usb , photoelectric interface can directly insert
- Adapter - 230 v
- Printer input voltage - 16v - 1.5 A
- Power consumption - 5w
- Printing material - carton , stone , pipe , plastic material , fiber board .

**P100 ONLINE  
THERMAL INKJET  
PRINTER  
MACHINE**





# Specification

- Nozzle - TIJ 2.5 thermal forming CPU cord core 1.4 hz
- Language - English ( total 20 language)
- Touchscreen - 4.3 inches
- Print height - 12.7 mm
- Print distance - 1mm to 5 mm
- Print content - text, date , batch no , table , liner barcode and QR code
- Defination - 300 to 600 dpi
- Storage - 100 messages
- Printing length - 2000 characters of 5mm for each message
- Printing speed - 30 to 50 Mtr / hr
- Ink color - black
- Ink cartridge - solvent based 42ml (approx 25 to 28 lakh characters of 3 mm can be printed by 300dpi.
- Cartridge storage - AC room ( better ) or normal room temperature
- External interface - usb , photoelectric interface can directly insert
- Adapter - 230 v
- Printer input voltage - 16v - 1.5 A
- Power consumption - 5w
- Printing material - carton , stone , pipe , plastic material , fiber board .

**P100 ONLINE  
THERMAL INKJET  
PRINTER  
MACHINE**

# Specification



- Brand : Made in India
- Power source : 220V
- Current : DC
- Phase : Single
- Frequency : 50Hz
- Body : SS-304
- Filling Head : Single Head
- Filling Volume : 100-1200 ml
- Capacity of Hopper : 30 L
- Stroke Cylinder : Janatics
- Air Supply : 4-6 bar
- Air Pressure : 0.6 Mpa
- Efficiency : 600-1500 bottles per hr
- Weight : 80Kg (Approx)

**PASTE FILLING  
MACHINE**